

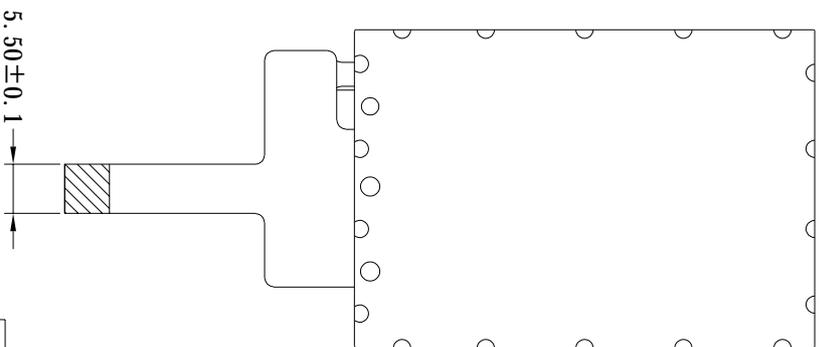


***为防止LCD产生图像残留，在使用常黑面板时不要长时间显示固定图案，建议时间少于 2 分钟或者更短的时间内刷新显示内容一次或多次。
 ***In order to prevent the LCD from producing image retention, do not display a fixed pattern for a long time when using a normally black panel. If the LCD needs to display a fixed pattern, it is recommended to refresh the display one or more times in less than 2 minutes or less.
 强烈建议使用黑色图像或移动图像作为屏幕保护程序。It is strongly recommended to use a black image or moving image as a screen saver.

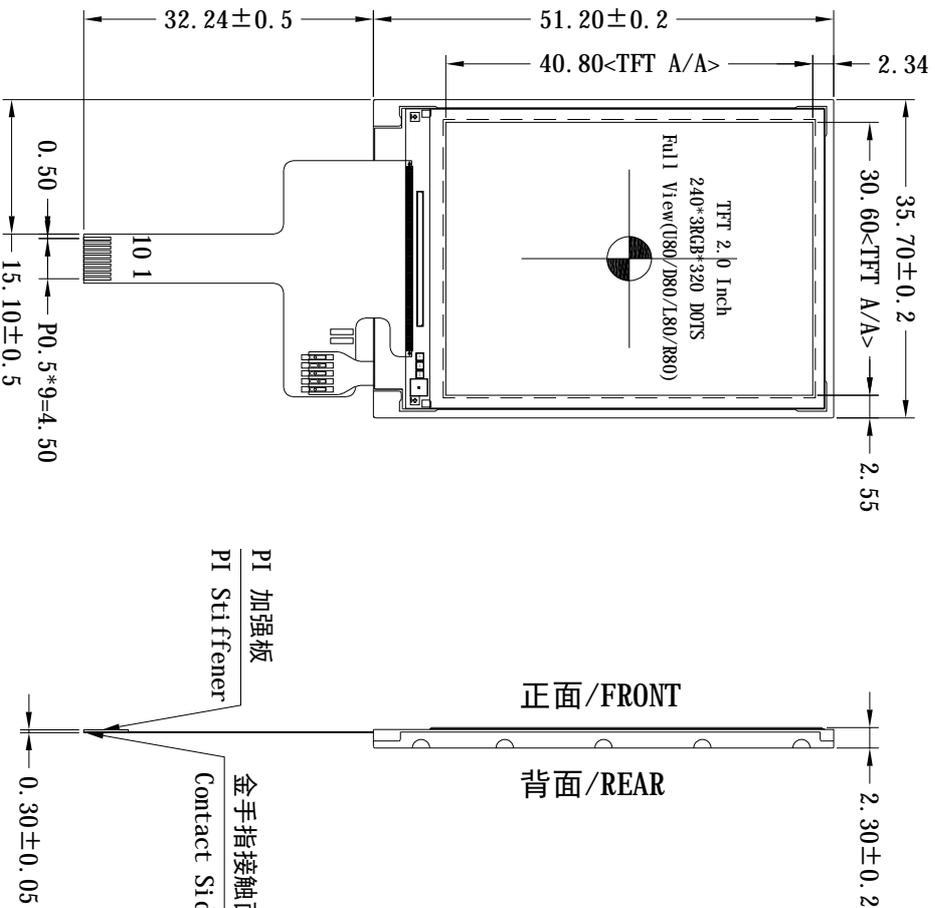

Pin_SIGNAL	Pin_SIGNAL
1	LED A
2	VCI
3	CSX
4	RESX
5	SCL
6	SDA
7	D/CX
8	SD0
9	LEDK
10	GND

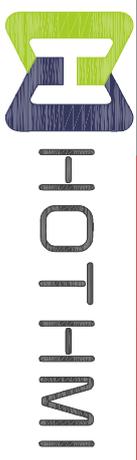

产品型号
TFT-H020A6QVI ST6N10

比例	1:1	设计制图	Li u. YL	日期	2022-09-17
版本	V0-0	单位	MM	公差	±0.3

液晶显示类型 LCD Display Type	薄膜晶体管/透射式/常黑/262K 色 TFT/Transmittive/Normal Ly Black/262K COLOR	TFT 储存温度 TFT Storage Temp	-30 °C ~ 80 °C
观看方向/角度 Viewing Direction	Full View(U80/D80/R80/L80)	TFT 驱动芯片 TFT Driver IC	ST7789
接口 Interface	4-line 8bit serial I/F	背光 Backlight	白色/4 LEDs/1灯串联4路并联
工作电压 Operating Voltage	VCI=3.3V(Typ)	液晶模组亮度 LCM Brightness	600 cd/m ² (Typ)/固定电流测试
TFT 工作温度 TFT Operating Temp	-30 °C ~ 80 °C		

A B C D A B C D